Solvido SOL-IQbox-eco-B/Hz

SKU: 220522

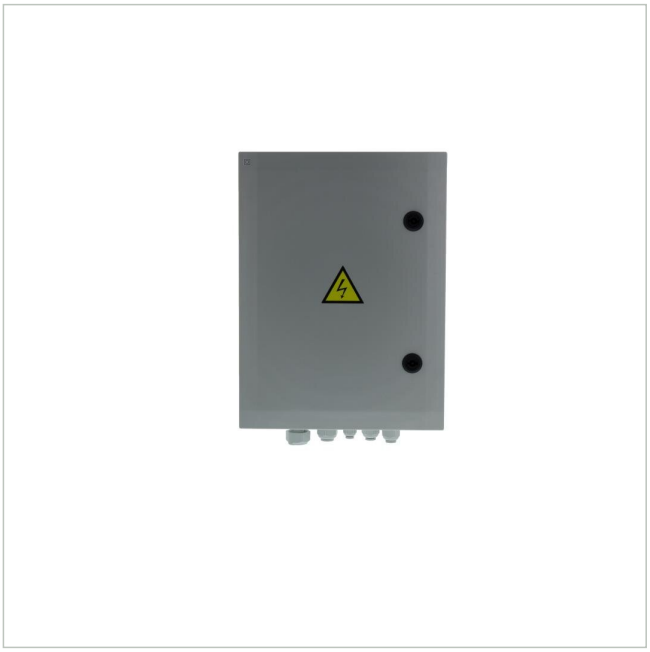

Camera junction box for video surveillance with socket, FI/LS and heating

Main Features

Optimised for outdoor use	Impact resistance IK 10, vandalism protected
With extended temperature range	Swivelling door
Electrically prewired for flexible, modular expansion.	Wall or mast mounted
UV stable polycarbonate, corrosion-resistant	Fast, easy installation
Protective class IP66,	Simple mechanical finishing

Specifications

General	
Power supply	230VAC
Temperature Range (Operating)	-50°C ~ +70°C
Certifications	IK10
Product labeling:	
Manufacturer order number	220522
Series	Solvido IQbox

Optional Accessory

SKU	Name	Description

© Copyright VIDEOR E. Hartig GmbH - October 2026 - technical changes reserved

Solvido SOL-IQbox-eco-B/Hz

Continuation of accessory

209744	Solvido SOL-WST-MB-30	Pole mounting for CUS-WST and SOL-IQbox series set (2pcs)
220468	Solvido SOL-WST-SH/1	Swivelling lever for profile half-cylinder (1pc.) delivery without lock cylinder
219463	Solvido SOL-WST-SSK-ES-30	
220068	Solvido SOL-WST-SSK/1	Lock with toggle lock (1 piece) with key, for CUS-WST and SOL-IQbox series
209743	Solvido SOL-WST-WB	Wall mounting for CUS-WST and SOL-IQbox series set (4pcs) wall clearance 10mm

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

© Copyright VIDEOR E. Hartig GmbH - October 2026 - technical changes reserved