
Solvido SOL-IQbox-plus-B

SKU: 226845

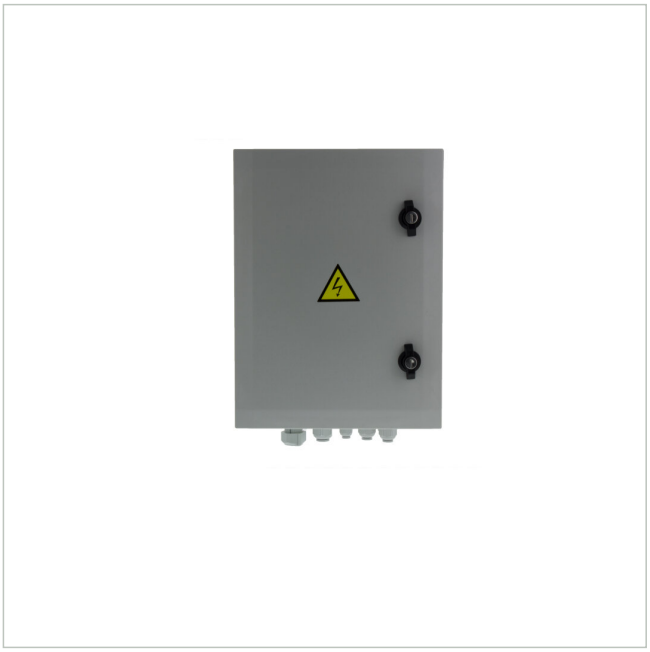

camera connection box for video security with lightning protection, 400x300x210mm

Main Features

Optimised for outdoor use	Wall or mast mounted
Electrically prewired for flexible, modular expansion.	Fast, easy installation
UV stable polycarbonate, corrosion-resistant	Simple mechanical finishing
Protective class IP66	Including service socket and electrical circuit breaker
Impact resistance IK 10, vandalism protected	Lightning protection combination arrestor type
Swivelling door (with door contact switch)	

Specifications

General	
Power supply	230VAC
Temperature Range (Operating)	-40°C ~ +70°C
Certifications	IK10
Product labeling:	
Manufacturer order number	226845
Series	Solvido IQbox

Optional Accessory

SKU	Name	Description

© Copyright VIDEOR E. Hartig GmbH - November 2026 - technical changes reserved

Solvido SOL-IQbox-plus-B

Continuation of accessory

211278	jetrics fiber SBT12 Spleißbox	Spleissbox mit Telekom Spleisskassette für 12 Spleisse
210300	jetrics MDR-100-12	Power Supply 12V / 7,5A for DIN rail mounting TS-35
209004	jetrics MDR-100-48	Power Supply 48V / 2A
211604	jetrics MDR-20-12	Power Supply 12VDC / 1,67A for DIN rail mounting TS-35
211055	jetrics MDR-60-12	Power Supply 12VDC / 5A for DIN rail mounting TS-35
211056	jetrics MDR-60-48	Power Supply 48VDC / 1,25A for DIN rail mounting TS-35
236262	Solvido 50W Semiconductor power supply	with thermostat, for DIN rail mounting
209744	Solvido SOL-WST-MB-30	Pole mounting for CUS-WST and SOL-IQbox series set (2pcs)
220468	Solvido SOL-WST-SH/1	Swivelling lever for profile half-cylinder (1pc.) delivery without lock cylinder
219463	Solvido SOL-WST-SSK-ES-30	
220068	Solvido SOL-WST-SSK/1	Lock with toggle lock (1 piece) with key, for CUS-WST and SOL-IQbox series
209743	Solvido SOL-WST-WB	Wall mounting for CUS-WST and SOL-IQbox series set (4pcs) wall clearance 10mm

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

VIDEOR

© Copyright VIDEOR E. Hartig GmbH - November 2026 - technical changes reserved