


eneo VM-HD19MR

SKU: 229200

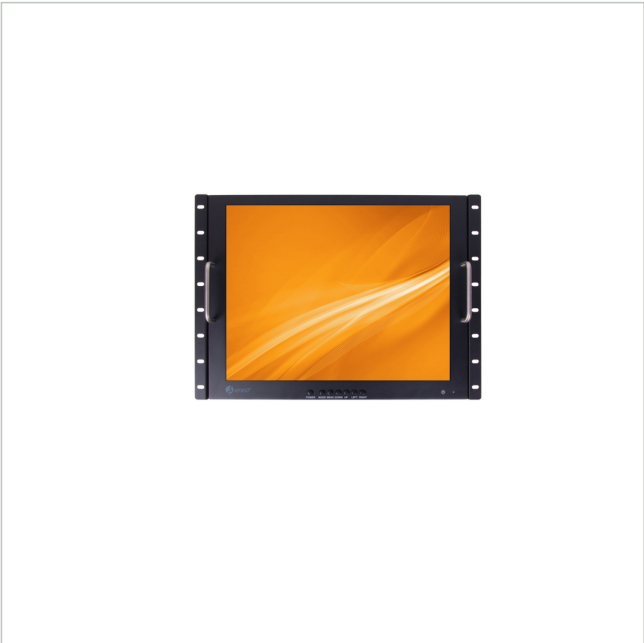

19" (48cm) LCD, industrial Monitor, 1280x1024, Protection Glass, Rack Mount, 12V, HDMI

Camera not included

Main Features

Professional 19" (48 cm) LCD monitor	Fast response time 5ms
Built to run 24x7x365 continuously (Industrial Level)	Different video inputs HDMI, VGA, BNC (CVBS)
Including protection glass, Anti-Glare-Display 3H	Audio In- and Output
Extended temperature range -30°C +85°C	Built-in speakers
Maximum resolution 1280x1024 pixels	Supply voltage: 12VDC
LED Back Light	Including 19" mounting frame

Specifications

General	
Applications	Industry
Housing material	Metal
Display	_headline, Anti-glare display, Color TFT-LCD, Hard coating (3H)
Viewing Angle Horizontal	178 °
Viewing Angle Vertical	178 °
Screen diagonal (cm)	48 cm
Screen diagonal (inches)	19 "
Brightness (typical)	350 cd/m²
Backlight	LED

eneo VM-HD19MR

Continuation of the specifications

Contrast ratio (typical)	1000:1
Response time (typical)	5 ms
Aspect ratio	5:4
Refresh rate	60 Hz
Functions	
Menu languages	English
Notes	
Remark	NDAA compliance under Section 889
Interfaces / Inputs/ Outputs	
Audio Inputs	1
Transmission Technology	HDCP 1.4, HDCP 2.2, HDMI 1.4a
Control Interfaces	no
Video Inputs	2x Composite (FBAS), HDMI, VGA
Parts supplied	
Scope of delivery	manual,power cord,PSU 100~240VAC,IR remote controller,HDMI cable
Product labeling:	
Manufacturer order number	229200
Series	eneo Monitor

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

