




# eneo ISM-32F0036M00

SKU: 234978

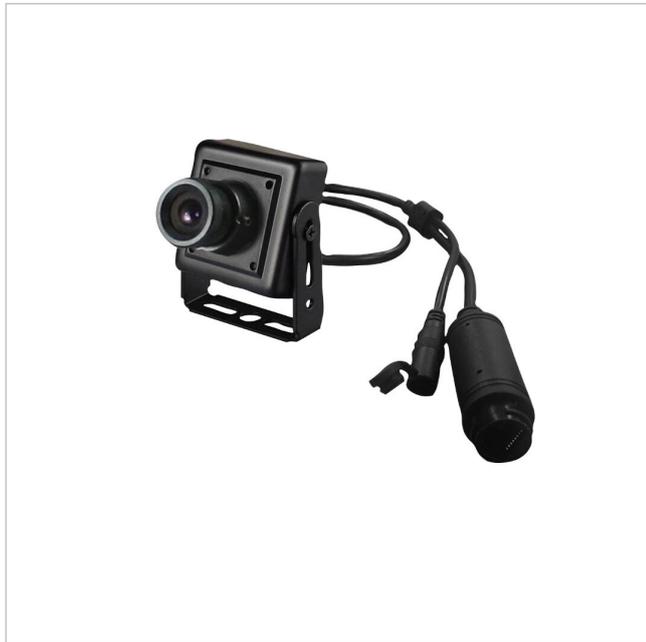

1/2,8" Mini Network Modul, 1920x1080, Day&Night, 3DNR, 3,6mm, 12VDC, PoE, Indoor

## Main Features

Sony STARVIS 2MP Image Sensor	2DNR, 3DNR and WDR support
Resolution max. 1920x1080 (Full HD)	PoE Cable
Video Compression Format: H.264/MJPEG	Lens 3.6mm (further lenses upon request)
Motion Detection	Power Supply 12VDC (1.8W) or PoE (IEEE802.3af)
Built in SD micro slot	Operation Temperature -10°C - +50°C
Low Speed Shutter	

## Specifications

General	
Lighting	No
Dimensions (WxHxD) (extended)	35x35mm
Weight	0.2 kg
Text overlay	available
Color (Housing)	black
Housing type	Inside
Housing material	Metal
Camera Type	Board Camera
Power consumption	1.8 W

# eneo ISM-32F0036M00

Continuation of the specifications

Mounting type	Ceiling, Wall
Power over Ethernet	IEEE 802.3af
Power supply	12VDC
Temperature Range (Operating)	-10°C ~ +50°C
Wide Dynamic Range (WDR)	WDR 100dB
Certifications	IK08
<b>Camera</b>	
Resolution standard	2 MP
Recording sensor	CMOS
Chip size	1/2,8"
Flickerless function	Yes
Camera shape	Module
Signal-to-noise ratio	50 dB
Day/night mode	Automatic,Day,Night
White balance	Indoor,Outdoor,User defined,Push
Photosensitivity	0,1 Lux bei F2,5,30 IRE
System	Electronic Day&Night
Day/night switching	Electronic
<b>Display</b>	
Image resolution max.	1920x1080
<b>DORI</b>	
Watch (62px/m)	22 m
Detect (125px/m)	9,9 m
Identify (250px/m)	3,6 m
Perceiving (25px/m)	56,6 m
<b>Functions</b>	
Digital Noise Reduction (DNR)	Yes
Alarm processing	FTP
Browser	Edge: MJPEG, Mozilla: MJPEG, MS Internet Explorer from Vers. 9.0 or higher, Safari: MJPEG
Menu languages	English
Password	Administrator and User
Internal memory	microSD card slot
<b>Notes</b>	
Remark	To guarantee you an optimum user experience,we recommend that you only use components of the same brand in a system. If several brands are used in combination,eneo cannot guarantee functionality. If combined use is necessary,we offer a compatibility check
<b>Interfaces / Inputs/ Outputs</b>	
Alarm inputs	0
External connections	RJ-45,connection cable approx.15cm

# eneo ISM-32F0036M00

Continuation of the specifications

Control Interfaces	Ethernet
<b>Parts supplied</b>	
Scope of delivery	manual,bag of screws,mounting bracket
<b>Lens</b>	
Horizontal angle of view	92°
Vertical angle of view	49°
Focal length	3,6 mm
Zoom Factor (Digital)	0
<b>Video</b>	
Image transfer rate max.	30 fps
Resolution (extended)	1920x1080 (16:9),1280x720 (16:9),800x600 (4:3),704x480 (4:3),640x480 (4:3),320x240 (4:3)
Data stream types	2x H.264,1x MJPEG simultan
Video Compression	H.264, M-JPEG
<b>Product labeling:</b>	
Manufacturer order number	234978

## Your contact person

VIDEOR E. Hartig GmbH  
 Carl-Zeiss-Straße 8  
 63322 Rödermark  
 Germany

