




# eneo IND-58F0028MTLA

SKU: 238647

EAN: 4260229840641

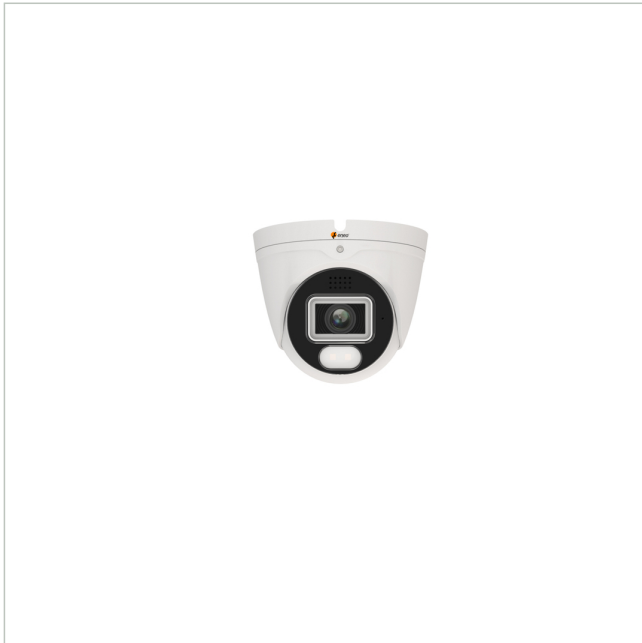

Network Dome Camera Fix, Turret, Ultra Low Light, 3840x2160, Day/Night, WDR, AI, 2.8mm, White Light, 12VDC, PoE, IP67

## Main Features

1/1.8" Sony STARVIS CMOS sensor

Very good detail recognition even in dark areas

Maximum resolution 3840x2160 pixels, 30fps

AI analysis functions including object classification

WDR 120dB, 3D DNR noise reduction

Lens fixed focal length 2.8mm

Smart codec H.265/H.264, multi-streaming

Browser-independent (Edge, Safari, Firefox, Chrome)

Supports ONVIF profiles S/T/G/M

Local storage via micro SD card

NDAA compliance

White light LED illumination, IP67

## Specifications

General	
Heating	No
Lighting	White
Dimensions (WxHxD) (extended)	115,5x97,9mm
Illumination range	Approx 25m
ESC	1/5 ~ 1/20.000sec.
Weight	0.57 kg
SDK	upon request
Text overlay	Switchable on/off
Color (Housing)	RAL9003 / Other colors available upon request

# eneo IND-58F0028MTLA

Continuation of the specifications

Housing type	Outside
Housing material	Aluminium
Camera Type	Domecamera
Power consumption	6.5 W
Mounting type	Ceiling, Wall
ONVIF	ONVIF Profile G, ONVIF Profile M, ONVIF Profile S, ONVIF Profile T
Power over Ethernet	IEEE 802.3af
Protection	IP67, NEMA 4X
Power supply	12VDC, Poe
Temperature Range (Operating)	-30°C ~ +55°C, @ Luftfeuchtigkeit 95% oder weniger (nicht kondensierend)
Wide Dynamic Range (WDR)	WDR 120dB
<b>Camera</b>	
Backlight compensation	Yes
Low Speed Shutter	Yes
Resolution standard	8 MP
Recording sensor	CMOS, Sensor IMX678
Chip size	1/1,8"
Flickerless function	Yes
Camera shape	Minsters
Manual Electric Shutter (MES)	1-5~1-20,000sec.
Signal-to-noise ratio	49 dB
Day/night mode	not available
White balance	Automatic, Manual
Photosensitivity	0.0005 Lux bei F1,0
System	24h Color
Day/night switching	No
<b>Display</b>	
Image resolution max.	3840x2160
<b>DORI</b>	
Watch (62px/m)	23,7 m
Detect (125px/m)	11,4 m
Identify (250px/m)	5,4 m
Perceiving (25px/m)	59,5 m
<b>Functions</b>	
Audio support	Yes
Motion detector	Yes
Digital Noise Reduction (DNR)	Yes
Multicast	Yes

## eneo IND-58F0028MTLA

Analysis	Abandoned and Removed Objects (SOD), Attendance (FA), Crowds (CD), Enter Region, Face Attributes (AD), Face Capture (FD), Face Recognition (FR), Heat Map (HM), Intrusion, Intrusion (PID), Leave Region, License plate recognition (LPD), License plate recognition (LPR), Line crossing (LCD), Manipulation (TD), Object Classification Human / Vehicle (PD&VD), Passage count (CC), Queues (QD), Rare Sounds (RSD)
----------	---

# eneo IND-58F0028MTLA

Continuation of the specifications

Alarm processing	Recording internal storage (SD card),E-Mail,HTTP,FTP,TCP,UDP,Red & blue flashing lights,Siren,Cloud Upload
Audio	2 Way Audio, Built-in microphone, Built-in speaker
Browser	Edge, Firefox, Google Chrome, Safari
Menu languages	English, French, German, Italian, Japanese, Portuguese, Russian, Spanish, Turkish
Password	Administrator and User
Privacy Zone	Areas-ON/OFF switchable
Internal memory	microSD card slot
<b>Interfaces / Inputs/ Outputs</b>	
External connections	RJ-45,12VDC input (DC plug),connection cable approx.30cm,micro SD card slot 256 GB
Control Interfaces	Ethernet
<b>Parts supplied</b>	
Scope of delivery	Quick installation guide,drilling template,3x wall plugs with screws,1x Allen wrench,1x waterproof cover for RJ45 connector
<b>Network</b>	
Network Protocols	DDNS, DHCP, DNS, FTP, HTTP, HTTPS, IEE 802.1, NTP, RTP, RTSP, SMTP, TCP-IP, UPnP
<b>Lens</b>	
Horizontal angle of view	112°
Vertical angle of view	61°
Focal length	2,8mm
Aperture Range (F)	F1,0
MOD (Minimum Object Distance)	1 m
Lens Type	Prime lens
<b>Video</b>	
Image transfer rate max.	30 fps
Resolution (extended)	3840x2160 (16:9),2592x1944 (4:3),3072x1728 (16:9),2592x1520 (16:9),2304x1296 (16:9),1920x1080 (16:9),640x480 (4:3),320x240 (4:3)
Picture size	16:9, 4:3
Data stream types	Triple-Stream(Main/Sub/Mobile)
Video Compression	H.264, H.264+, H.265, H.265+, M-JPEG
<b>Product labeling:</b>	
EAN/GTIN	4260229840641
Manufacturer order number	238647
Series	eneo IN-Serie

## Optional Accessory

SKU	Name	Description
-----	------	-------------

# eneo IND-58F0028MTLA

Continuation of accessory

233775	eneo AK-21	Camera connection box for Wall and ceiling mounting, Bullet and Dome Cameras IN series
245314	eneo AK-30	Camera junction box for wall- and ceiling mount fix turret dome and bullet cameras IN-Serie
234757	eneo DOME-WB7	Wall bracket for Mini Dome IND-42M2808M0A
234989	eneo INsight	Control software for recorder IN- and MN-series
236198	eneo INsight Installation Tool	Supports adjustments for cameras with AI features for IN-series
234990	eneo INsight mobile	Mobile App for recorder IN- and MN-series
218218	eneo Site Manager	Management Software for eneo IP products

## Optional Services

SKU	Name	Description
214441	PAINTING SERVICE basic costs	once per RAL color and delivery lot
211125	PAINTING SERVICE fix dome camera	in RAL color
229234	Vorkonfiguration IP-Kamera	Preconfiguration 1x IP camera Function test, FW update

## Your contact person

VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8  
63322 Rödermark  
Germany

