




eneo VM-UHD55MOH

SKU: 240950

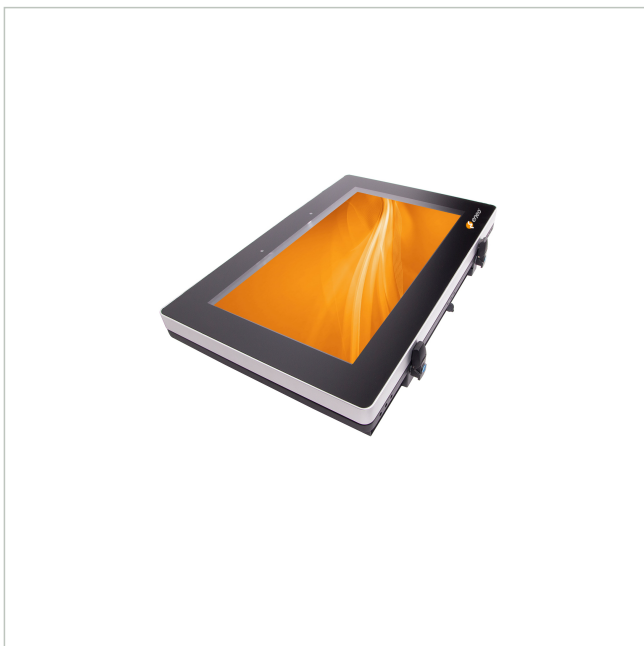

55" (140cm) LCD Monitor, outdoor 4K UHD, 3840x2160, DisplayPort, HDMI, 3000nits, IP67/65, outdoor

Main Features

Professional 55" (140cm) LCD monitor

Maximum resolution 4K UHD 3840x2160 pixels

Suitable for outdoor use IP67/65

Contrast ratio typically 4,000:1

Very high brightness 3,000 cd/sqm

Easy to read in bright sunlight

LED backlight

Digital 3D filtering and noise suppression

Designed for continuous operation 24x7x365

Versatile inputs DisplayPort, HDMI

Metal housing (suitable for industrial use)

Further monitor sizes upon request

Specifications

General	
Applications	Industry, Outside
Dimensions (WxHxD) (extended)	1360x855x132mm
Fortification	VESA Standard 600x600mm
Weight	65 kg
Housing material	Metal
Power consumption	120 W
Certifications	IK10,IP65,IP67
Display	_headline, Anti-glare display, Color TFT-LED, Hard coating (3H), Special Glass
Viewing Angle Horizontal	178 °

eneo VM-UHD55MOH

Continuation of the specifications

Viewing Angle Vertical	178 °
Screen diagonal (cm)	140 cm
Screen diagonal (inches)	55 "
Pixel error class	ISO 13406-2, Class 2
Brightness (typical)	3,000 cd/m ²
Backlight	LED
Contrast ratio (typical)	4000:1
Response time (typical)	5 ms
Aspect ratio	16:9
Functions	
Comb filter	Yes
Menu languages	English, German
Notes	
Remark	NDAA compliance under Section 889
Interfaces / Inputs/ Outputs	
Control Interfaces	no
Video Inputs	DisplayPort, HDMI 2.0
Parts supplied	
Scope of delivery	manual,HDMI cable,power cord,IR remote controller
Video	
Resolution (extended)	800x600,1024x768,1280x1024,1600x900,1920x1080,3840x2160
Maximum Image Resolution (HV)	3840x2160
Product labeling:	
Manufacturer order number	240950
Series	eneo Monitor

Your contact person

VIDEOR E. Hartig GmbH
 Carl-Zeiss-Straße 8
 63322 Rödermark
 Germany

