


eneo NSFP-3000SSC

SKU: 242373

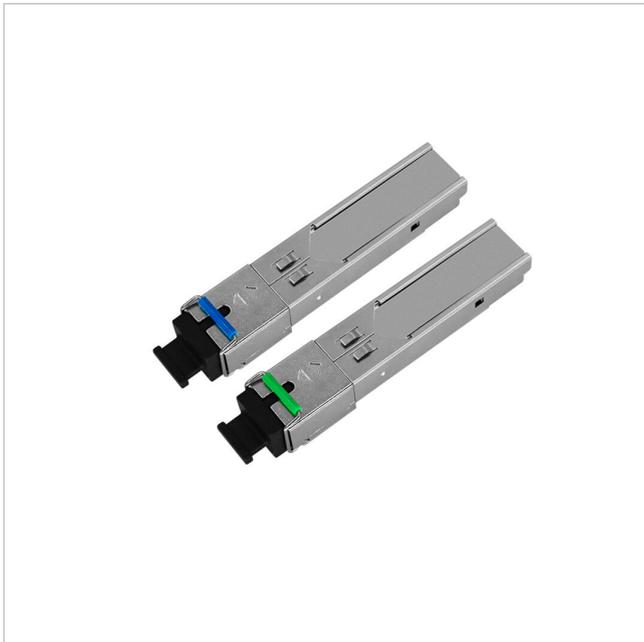

SFP Modul Pair, 1,25Gbps, 3KM, Simplex SC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring

Main Features

1250 Mbps data rate via single-mode fiber
BIDI design for single-fiber use (1310/1550 nm)
Up to 3 km range on 9/125 µm SMF
SC optical connector
Compliant with SFP MSA & SFF-8472
Digital Diagnostics (DDM/DOM) integrated

Single +3.3V power supply required
Metal housing reduces EMI interference
Wide temp. range: -40°C to +85°C (industrial)
TX fault and LOS detection supported
Low power consumption (max. 300 mA)
RoHS compliant and lead-free assembly

Specifications

| General | |
|-------------------------------|-------------------|
| Number of fibers | 1 |
| Design | Module |
| Dimensions (WxHxD) (extended) | 13,8x13,75x65,2mm |
| Application environment | inside |
| Weight | 43 kg |
| Transmission medium | Glass fibre |
| Type | SFP Module |
| Reach | 3 km |
| Temperature Range (Operating) | -40°C ~ +85°C |

eneo NSFP-3000SSC

Continuation of the specifications

| | |
|---------------------------|-------------|
| Recording | |
| Mode | Single Mode |
| Product labeling: | |
| Manufacturer order number | 242373 |

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

