


Solvido IQbox-mini-C

SKU: 246007

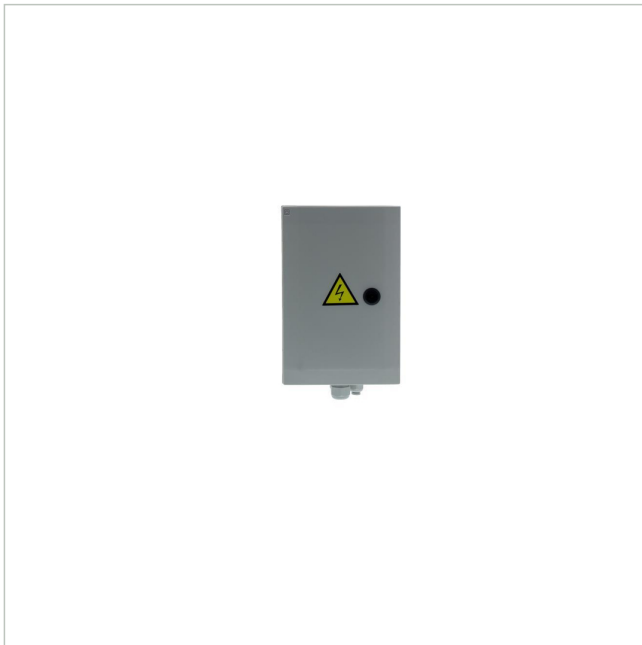

camera connection box for video security application, 300x200x150mm

Main Features

Optimised for outdoor use

UV-stabilised polycarbonate, corrosion-resistant

Colour: RAL7035

Protection rating (EN 60529): IP66

Impact resistance (EN 62262): IK10

Halogen-free (DIN/VDE 0472, Part 815): Yes

Door with PUR seal, hinge on long side

1-point locking with double-bit latch

Steel mounting plate

Pre-wired, for flexible, modular expansion

Includes 1-pole 6A circuit breaker

Wall or pole mounting

Specifications

Other	
Color (Housing)	RAL7035
Housing material	Polycarbonate
Installation Location	Outdoor
Mounting type	Mast mounting, Wall
Manufacturer order number	246007
Protection	IP66
Series	IQbox-mini-C
Power supply	230VAC
Temperature Range (Operating)	-40°C ~ +80°C

Solvido IQbox-mini-C

Continuation of the specifications

Certifications	IK10
----------------	------

Optional Accessory

SKU	Name	Description
210300	Jetrics MDR-100-12	Power Supply 12V / 7,5A for DIN rail mounting TS-35
209004	Jetrics MDR-100-48	Power Supply 48V / 2A
211055	Jetrics MDR-60-12	Power Supply 12VDC / 5A for DIN rail mounting TS-35
211056	Jetrics MDR-60-48	Power Supply 48VDC / 1,25A for DIN rail mounting TS-35
212371	Solvido SOL-WST-MB-20	Mastbefestigung 20cm für SOL-IQbox-mini, Set (2St)
220468	Solvido SOL-WST-SH/1	Swivelling lever for profile half-cylinder (1pc.) delivery without lock cylinder
220068	Solvido SOL-WST-SSK/1	Lock with toggle lock (1 piece) with key, for CUS-WST and SOL-IQbox series
209743	Solvido SOL-WST-WB	Wall mounting for CUS-WST and SOL-IQbox series set (4pcs) wall clearance 10mm

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

