


Solvido IQbox-Strong-C

SKU: 246008

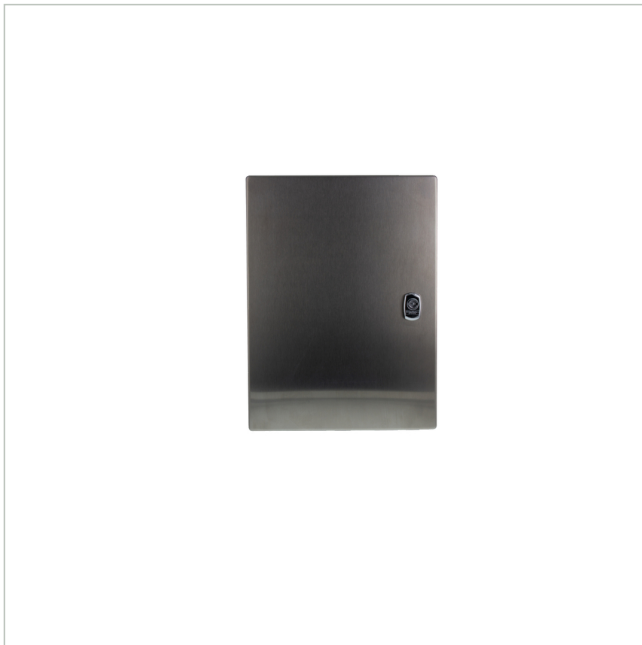

Camera junction box for video surveillance, stainless steel, 400x300x200mm

Main Features

Optimised for outdoor use

Brushed 1.4301 (AISI 304L) stainless steel housing

Protection rating (EN 60529): IP66

Impact resistance (EN 62262): IK10

Door with hinge on the long side

2-point locking with double-bit latch

Optional swivel lever for PHZ

Steel mounting plate

Pre-wired, for flexible, modular expansion

With tamper contact, incl. connection terminal

Includes 1-pole 6A circuit breaker

Wall or pole mounting

Specifications

Other	
Color (Housing)	Silver
Housing material	AISI 304, Stainless steel
Installation Location	Outdoor
Mounting type	Mast mounting, Wall
Manufacturer order number	246008
Protection	IP66
Series	IQbox-Edelstahl-C
Power supply	230VAC
Temperature Range (Operating)	-30°C ~ +80°C

Solvido IQbox-Strong-C

Continuation of the specifications

Certifications	IK10
----------------	------

Optional Accessory

SKU	Name	Description
210300	Jetrics MDR-100-12	Power Supply 12V / 7,5A for DIN rail mounting TS-35
209004	Jetrics MDR-100-48	Power Supply 48V / 2A
211604	Jetrics MDR-20-12	Power Supply 12VDC / 1,67A for DIN rail mounting TS-35
211055	Jetrics MDR-60-12	Power Supply 12VDC / 5A for DIN rail mounting TS-35
211056	Jetrics MDR-60-48	Power Supply 48VDC / 1,25A for DIN rail mounting TS-35
222056	Jetrics NDR-120-48 DIN Rail	Power Supply, 230VAC / 48VDC, max. 120W, for DIN rail mounting
228555	Jetrics NDR-240-48 DIN RAIL	Power Supply, 230VAC / 48VDC, max. 240W, for DIN rail mounting
221844	Solvido Montage	
230229	Solvido Montage	

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

