


Hanwha Vision XNF-A9014RV

SKU: 246255

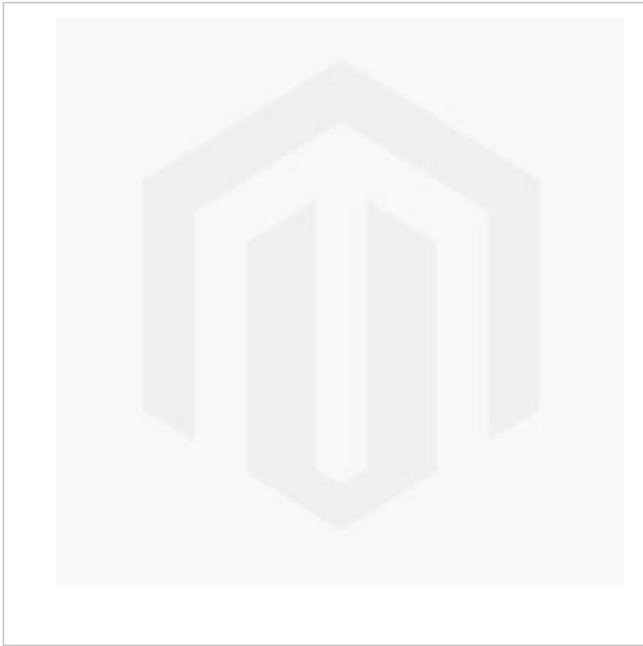

Main Features

Specifications

Other	
Heating	No
Audio support	Yes
Motion detector	Yes
Digital Noise Reduction (DNR)	Yes
Backlight compensation	Yes
Low Speed Shutter	Yes
Vandalism-resistant	Yes
Wiper	No
Analysis	Face, License plate recognition
Audio compression	AAC-LC, G.711, G.726, OPUS
Resolution standard	12 MP
Recording sensor	CMOS
Lighting	Infrared, LED
Image resolution max.	3584 x 2688
Image transfer rate max.	30 fps
Horizontal angle of view	185°
Vertical angle of view	185°

Hanwha Vision XNF-A9014RV

Continuation of the specifications

Focal length	1,76 mm
Turning range	360 °
Ethernet interface	100Base-T, 10Base-T
Color (Housing)	White
Color (dome)	clear
Housing type	Aluminium
Housing material	Aluminium
Internal memory	microSD card, microSDHC card, microSDXC card
Camera Type	Domecamera
Power consumption	19.8 W
Photosensitivity	0,02 Lux
Mounting type	Ceiling, Wall
Network Protocols	and others, HTTP, HTTPS, IPv4, IPv6, RTSP, TCP, TCP-IP
Lens Type	Fisheye, Prime lens
ONVIF	ONVIF Profile G, ONVIF Profile M, ONVIF Profile S, ONVIF Profile T
Manufacturer order number	XNF-A9014RV
Ports	RJ-45
Power over Ethernet	IEEE 802.3af, IEEE 802.3at
Protection	IP66
Control Interfaces	Ethernet
Power supply	12VDC
System	True Day&Night
Day/night switching	Switchable IR Filter (ICR)
Temperature Range (Operating)	-40°C - 55°C
Video Compression	H.264, H.265, MJPEG
Wide Dynamic Range (WDR)	120dB
Certifications	CE,FCC,UL,IK10,NEMA 4X

Hanwha Vision XNF-A9014RV

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

