




eneo VM-UHD55MOHP Portrait

SKU: 246574

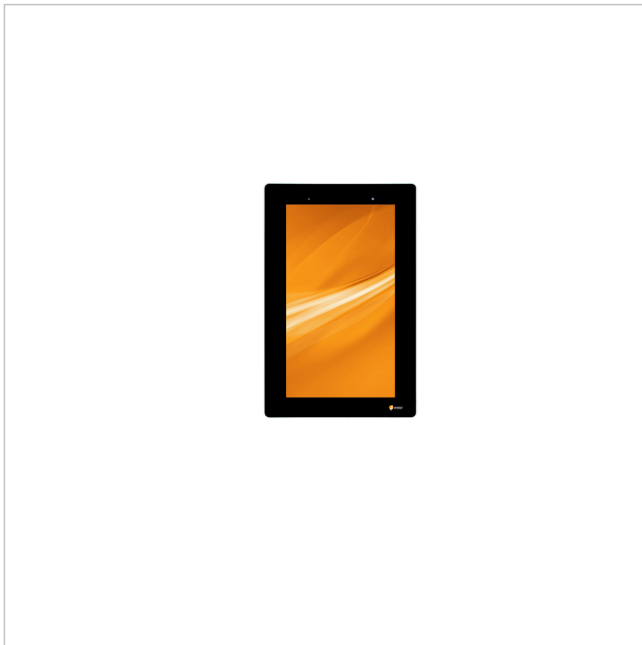

55" (140cm) LCD Monitor, outdoor, portrait modus, 4K UHD, 3840x2160, DisplayPort, HDMI, 3000nits, IP67/65, outdoor, portrait modus

Main Features

Professional 55" (140cm) LCD monitor	LED backlight
Maximum resolution 4K UHD 3840x2160 pixels	Digital 3D filtering and noise suppression
Suitable for outdoor use IP67/65	Designed for continuous operation 24x7x365
Contrast ratio typically 4,000:1	Versatile inputs DisplayPort, HDMI
Very high brightness 3,000 cd/sqm	Metal housing (suitable for industrial use)
Easy to read in bright sunlight	Further monitor sizes upon request

Specifications

Other	
Comb filter	Yes
Applications	Industry, Outside
Viewing Angle Horizontal	178 °
Viewing Angle Vertical	178 °
Screen diagonal (cm)	140
Screen diagonal (inches)	55 "
Dimensions (WxHxD) (extended)	1360x855x132mm
Resolution (extended)	800x600,1024x768,1280x1024,1600x900,1920x1080,3840x2160
Fortification	VESA Standard 600x600mm

eneo VM-UHD55MOHP Portrait

Continuation of the specifications

Remark	NDA compliance under Section 889.
Display	Anti-glare display, Color TFT-LED, Hard coating (3H), Special Glass
Weight	65 kg
Scope of delivery	Manual, HDMI cable, power cord, IR remote controller
Menu languages	English, German
Pixel error class	ISO 13406-2, Class 2
Transmission Technology	Display Port (DP), HDMI 2.0
Color (Housing)	Black
Housing material	Metal
Brightness (typical)	3,000 cd/m ²
Backlight	LED
Contrast ratio (typical)	4000:1
Power consumption	120 W
Maximum Image Resolution (HV)	3840x2160
Manufacturer order number	246574
Response time (typical)	5 ms
Aspect ratio	16:9
Series	eneo Monitor
Control Interfaces	no
Power supply	230VAC
Video Inputs	DisplayPort, HDMI
Certifications	IK10, IP65, IP67

Your contact person

VIDEOR E. Hartig GmbH
 Carl-Zeiss-Straße 8
 63322 Rödermark
 Germany

