

## DS-KIS604-S(C) IP video intercom kit



- IP video intercom for villa or house
- One call button for easier calls
- Convenient Hik-Connect App mobile control
- Stores messages and captured pictures in the TF card
- Including: DS-KV8113-WME1(C) x 1, DS-KH6320-WTE x 1, 4 port standard PoE switch x 1, DS-KABV8113-RS/Surface x 1, Administrator card x 1, Key fob x 5, PSU x 1

*\*Network Video Intercom Bundle for villa or house, only one call button.*

*\*DS-KV8113-WME1(C) x1;*

*\*DS-KH6320-WTE1 x1;*

*\*4 port standard PoE switch x1;*


*\*16GB TF card x1;*

## ▪ Specification

|                            |                                                                                |
|----------------------------|--------------------------------------------------------------------------------|
| <b>Door station</b>        |                                                                                |
| Operation system           | Embedded Linux operation system                                                |
| Flash                      | 32 M                                                                           |
| RAM                        | 256 M                                                                          |
| <b>Door station</b>        |                                                                                |
| Supplement light           | IR supplement                                                                  |
| Resolution                 | Main stream : 1920 × 1080p, 1280 × 720p<br>Sub stream : 1280 × 720p, 640 × 480 |
| Lens                       | 1                                                                              |
| WDR                        | Support                                                                        |
| FOV                        | Horizontal: 124° Vertical: 75°                                                 |
| Video compression standard | H.264; h.265; MJPEG                                                            |
| <b>Door station</b>        |                                                                                |
| Audio input                | Built-in omnidirectional microphone                                            |
| Audio output               | Built-in loudspeaker (more than 80 dB within 30 cm)                            |
| Volume adjustment          | Adjustable                                                                     |
| Audio quality              | Noise suppression and echo cancellation                                        |
| Audio compression standard | G711U、G711A、G726、AAC_LC、AAC_LD、OPUS、G722.1                                     |
| Audio compression Rate     | 64 Kbps                                                                        |
| Audio quality              | Noise suppression and echo cancellation                                        |
| <b>Door station</b>        |                                                                                |
| User capacity              | 2000                                                                           |
| <b>Door station</b>        |                                                                                |
| Network protocol           | TCP/IP, RTSP, IPV6, ONVIF                                                      |
| Wired network              | 10/100 Mbps self-adaptive Ethernet                                             |
| Wi-Fi                      | Wi-Fi 802.11 b/g/n                                                             |
| 3G/4G                      | /                                                                              |
| Bluetooth                  | /                                                                              |
| <b>Door station</b>        |                                                                                |
| Network interface          | 1                                                                              |
| Wiegand                    | 0                                                                              |
| RS-485                     | 1                                                                              |
| Lock control               | 2                                                                              |
| Alarm input                | 4                                                                              |
| Exit button                | 2 Max.                                                                         |
| Door contact               | 2                                                                              |
| Alarm output               | 0                                                                              |
| Power interface            | 1                                                                              |
| TAMPER                     | 1                                                                              |
| USB interface              | 0                                                                              |
| TF card                    | 1 (reserved)                                                                   |
| <b>Door station</b>        |                                                                                |
| Button                     | 1                                                                              |
| Power consumption          | < 10 W                                                                         |


|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Indicator                  | 3                                                 |
| Working temperature        | -40° C to 53° C(-40° F to 127.4° F)               |
| Power supply               | Standard PoE/12 VDC                               |
| Power consumption          | < 10 W                                            |
| Working humidity           | 10% to 95%                                        |
| Dimension                  | 174 mm × 91 mm × 29 mm                            |
| Protection level           | IP65, IK08                                        |
| Application environment    | Outdoor                                           |
| Weight                     | 380 g                                             |
| Indicator                  | 3                                                 |
| Installation               | Surface Mounting                                  |
| Power supply               | IEEE802.3af, standard PoE<br>12 VDC               |
| <b>Indoor station</b>      |                                                   |
| Operation system           | Embedded Linux operation system                   |
| Memory                     | 128 MB                                            |
| Flash                      | 32 MB                                             |
| <b>Indoor station</b>      |                                                   |
| Display screen             | 7-inch colorful TFT screen                        |
| Display resolution         | 1024 × 600                                        |
| Operation method           | Capacitive touch screen                           |
| <b>Indoor station</b>      |                                                   |
| Audio input                | Built-in omnidirectional microphone               |
| Audio output               | Built-in loudspeaker                              |
| Audio quality              | Noise suppression and echo cancellation           |
| Audio compression standard | G.711 U                                           |
| Audio compression Rate     | 64 Kbps                                           |
| <b>Indoor station</b>      |                                                   |
| Wired network              | 10/100 Mbps self-adaptive                         |
| Network interface          | 1 RJ-45 10/100 Mbps self-adaptive                 |
| Wireless network           | Wi-Fi 802.11 b/g/n                                |
| Protocol                   | TCP/IP, SIP, RTSP                                 |
| <b>Indoor station</b>      |                                                   |
| RS-485                     | 1                                                 |
| Alarm input                | 8-ch alarm inputs                                 |
| Relay output               | 2                                                 |
| TF card                    | Max to 32 G, SD 2.0 or lower version              |
| <b>Indoor station</b>      |                                                   |
| Power consumption          | ≤ 6 W                                             |
| Power supply               | Standard PoE, 12VDC                               |
| Working temperature        | -10 °C to 55 °C (14 °F to 131 °F)                 |
| Working humidity           | 10% to 90%                                        |
| Dimension (L x W x H)      | 200 mm × 140 mm × 15.1 mm (7.9" ×<br>5.5" × 0.6") |

## ▪ Dimension

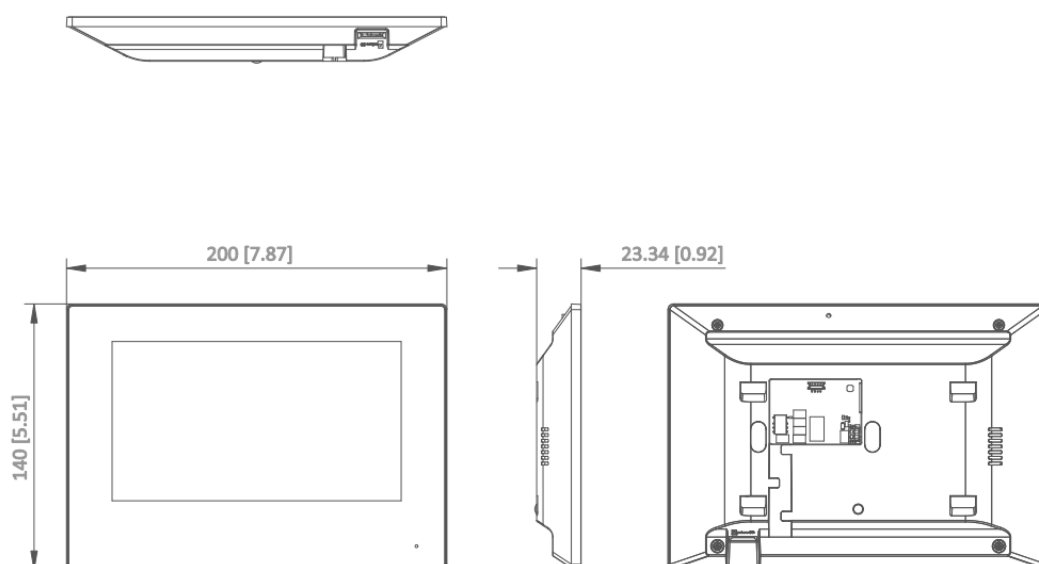

Unit:mm [inch]

|       |     |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

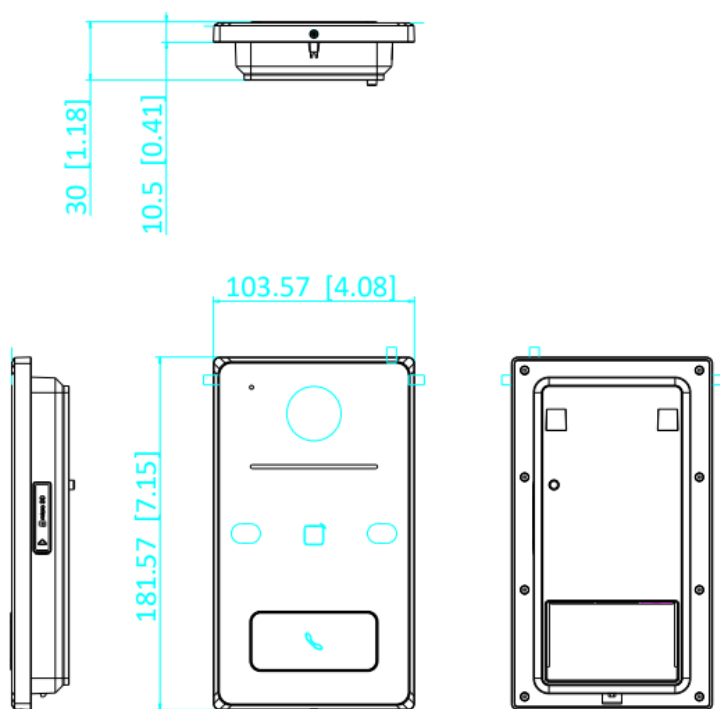

Unit:mm [inch]

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

