eneo MPC-52A0010M0B

Articlenumber: 241967

Short description

1/3" HD Camera, 1920x1080, 10x AF Zoom 5,1-51mm, T-WDR, HD-SDI, EX-SDI, TVI, Composite



Key features

- 1/2,8" 2,0 Megapixel Sony CMOS-Sensor
- Resolution max. 1920x1080, 1080p@60/50fps
- Optical 10x Auto Focus Zoom, 5,1~51mm
- Multisignal Output HD-SDI, EX-SDI, TVI, Composite
- WDR 120dB, DNR, motion detector
- Digital noise reduction (2D+3D)
- Image stabilization, privacy masking, defog
- Privacy Masking, Defog
- Slow Speed Shutter
- Compact Housing
- Power Supply 12VDC

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Features

Product Labels	
EAN/GTIN	4260229841822
Manufacturer number	241967
Camera	
Camera shape	Zoom cameras
Chip size	1/2,8"
Photosensitivity	0,003 Lux
Recording sensor	CMOS
System	True Day&Night
Low Speed Shutter	Yes
Flickerless function	Yes
Backlight compensation	Yes
Day/night switching	Switchable IR Filter (ICR)
Day/night mode	Automatic, Day, Night, extern (Sensor)
White balance	AUTO
Signal-to-noise ratio	50 dB
Video	
Signal Format	HD-TVI @ 2MP, EX-SDI @ 2MP, HD-SDI @ 2MP, Composite (FBAS)
Resolution (extended)	1920x1080, 1280x720
Horizontal resolution	700 TVL
Lens	
Lens Type	Auto Focus Zoom
Focal length	5,1 - 51 mm
Zoom Factor (Digital)	0
Aperture Range (F)	F1.6~F1.8
Vertical angle of view	34 - 3,5°
Horizontal angle of view	57 - 6,2°
Iris Control	DC
Zoomfactor (optical)	10
Display / Presentation	
Image resolution max.	1920x1080

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Features

DORI	
Perceiving (25px/m)	78 - 763 m
Watch (62px/m)	31,3 - 302,4 m
Detect (125px/m)	15,2 - 150,3 m
Identify (250px/m)	7,5 - 75,5 m
Features	
Motion detector	Yes
Analysis	Motion Detection
Menu languages	English, Japanese, Chinese
Digital Noise Reduction (DNR)	Yes
Interfaces / Inputs / Outputs	
Video Outputs	HD-TVI, HD-SDI, Composite (FBAS)
External connections	1x SDI Signal (BNC), 1x HD/SD Analog Signal (BNC), 12VDC power input, RS-485, external day&night switching, Alarm output
Number of alarm outputs	1
Control Interfaces	RS-485, Coaxitron (HD Protocol)
Interface Protocols	Pelco P, Pelco D
General	
Wide Dynamic Range (WDR)	WDR 120dB
Lighting	No
Dimensions (WxHxD) (extended)	62,2x59,2x99,6mm
Weight	0.36 kg
Color (Housing)	silvermetallic, black
Housing type	Inside
Housing material	Aluminium
Power consumption	3 W
Power supply	12VDC
Temperature Range (Operating)	-10°C ~ +50°C, @ Luftfeuchtigkeit 90% oder weniger (nicht kondensierend)
Text overlay	available
Scope of Delivery	
Scope of delivery	manual

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Optional Accessories

Art. Nr	Name	Product description
219504	eneo WD-30	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone Cool Grey 1C

Optional Recommendations

Art. Nr	Name	Product description
212984	eneo TVA-1201TRA	UTP Transmitter+Receiver, UTP, BNC, 250m, Indoor, HD TVI CVI, AHD, CVBS, Active, 12V
212985	eneo TVA-1201TRP	UTP Transmitter+Receiver, UTP, BNC, 150m, Indoor, HD TVI CVI, AHD, CVBS, Passive
220299	eneo MAM-5MM1001M0A	Converter, HD-CVI, HD-TVI, AHD, Composite to HDMI, VGA, Composite, Indoor
225085	eneo MAM-5DC1004M0A	Distributor, 1x BNC Input HD-TVI, CVI, AHD, CVBS, 4x BNC Output
207599	jetrics cable BNC BS-BS-1	Videokabel mit 2 x BNC-Stecker 1m, 75 Ohm
207600	jetrics cable BNC BS-BS-2	Videokabel mit 2 x BNC-Stecker 2m, 75 Ohm
207601	jetrics cable BNC BS-BS-3	Videokabel mit 2 x BNC-Stecker 3m, 75 Ohm
207602	jetrics cable BNC BS-BS-3	Videokabel mit 2 x BNC-Stecker 5m, 75 Ohm


Optional Services

Art. Nr	Name	Product description
211123	VIDEOR PAINTING SERVICE bullet camera	in RAL color
214441	VIDEOR PAINTING SERVICE basic costs	once per RAL color and delivery lot
229233	VIDEOR CON-KAM-AKON	Preconfiguration 1x analog camera Function test, FW update

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Technical Drawing

Maße / Dimensions in mm

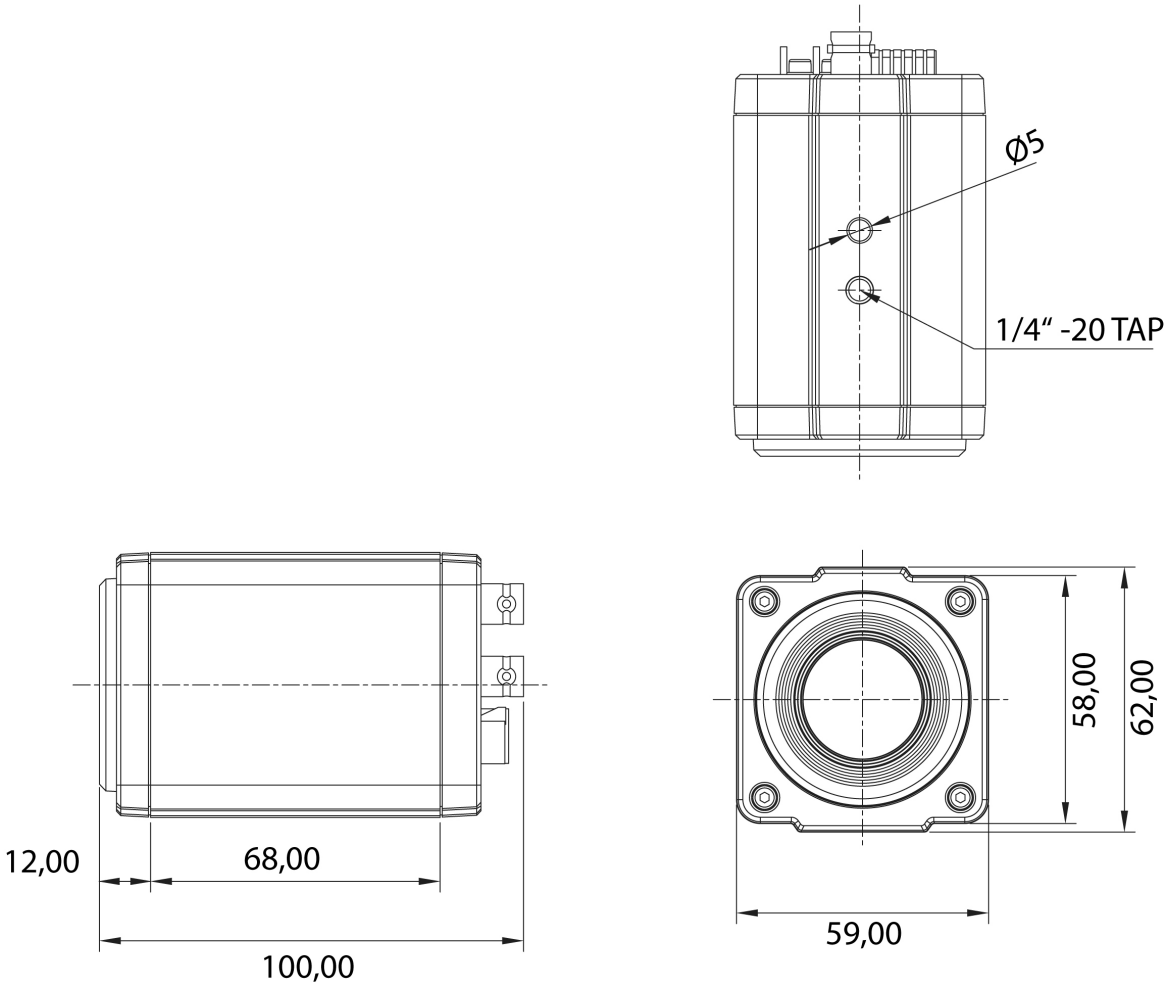

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes