eneo MPP-62A0020M0C

Articlenumber: 243176

Short description

1/2,8" HD Analogue Dome, PTZ, Day&Night, 20x, 4,7-94mm, 1920x1080, WDR, IP66, IK10



Key features

- 1/2,8" Sony STARVIS CMOS-Sensor
- 20x Auto Focus Zoom, 4.7 ~ 94mm / 16x Digital
- Resolution max. 1920x1080 (Full HD)
- Separate outputs for HD signals and composite
- Signal formats: HD-TVI, AHD selectable, composite
- Real time WDR (Wide Dynamic Range) 25 / 30fps
- Compact design for in- and outdoor applications
- 3D DNR noise reduction, auto-calibration
- Protected areas, Defog function
- Alarm inputs and outputs, 12VDC/24VAC, IK10, IP66

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Features

Product Labels	
EAN/GTIN	4260229841303
Manufacturer number	243176
Series	eneo COAXIZE
Camera	
Camera shape	PTZ
Chip size	1/2,8"
Photosensitivity	0,35 Lux bei F1,6, 50IRE
Recording sensor	CMOS
System	True Day&Night
Low Speed Shutter	Yes
Flickerless function	Yes
Backlight compensation	Yes
Day/night switching	Switchable IR Filter (ICR)
Day/night mode	Automatic, Day, Night
White balance	Automatic, Manual, Light bulb, Fluorescent light, Outdoor
Signal-to-noise ratio	50 dB
Video	
Signal Format	Composite (FBAS), HD-TVI @ 2MP, AHD @ 2MP
Resolution (extended)	1920x1080, 1280x720, 720x576
Lens	
Lens Type	Auto Focus Zoom
Focal length	4,7 - 94 mm
Zoom Factor (Digital)	16
Aperture Range (F)	F1.6~F3.0
Vertical angle of view	32,4 - 1,7°
Horizontal angle of view	55,5 - 3°
Zoomfactor (optical)	20
Display / Presentation	
Image resolution max.	1920x1080
DORI	
Perceiving (25px/m)	70 - 1370 m

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Features

Watch (62px/m)	28 - 550 m
Detect (125px/m)	13 - 270 m
Identify (250px/m)	7 - 130 m
Features	
Motion detector	Yes
Analysis	Defog, DIS (Digital Image Stabilization)
Home Position	Selectable, Tour, Preset, Pattern
Tours	8 selectable tours
Turning range	360 °
Speed (manual control)	380 °/sec
Speed (Target Approach)	380
Menu languages	English, German, French, Italian, Spanish, Polish, Portuguese
Digital Noise Reduction (DNR)	Yes
Interfaces / Inputs / Outputs	
Video Outputs	AHD, HD-TVI, Composite (FBAS)
External connections	Alarm in/output, voltage input, RS-485, Composite (FBAS), HD-TVI / AHD BNC, connection cable approx.25cm
Alarm inputs	4
Number of alarm outputs	2
Control Interfaces	RS-485, Coaxitron (HD Protocol)
Interface Protocols	Fastrax, Fastrax IIIE, Pelco D, Pelco P, UTC (HD Signal Format)
General	
Wide Dynamic Range (WDR)	WDR 120dB
Lighting	No
Dimensions (WxHxD) (extended)	150x154mm
Weight	1.6 kg
Color (Housing)	white
Color (dome)	clear
Housing type	Outside
Housing material	Aluminium
Power consumption	12 W
Mounting type	Wall, Ceiling

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Features

Protection	IP66
Power supply	12VDC, 24VAC
Temperature Range (Operating)	-10°C ~ +50°C, @ Luftfeuchtigkeit 10%-90% (nicht kondensierend)
Text overlay	available
Vandalism-resistant	Yes
Certifications	IK10
Scope of Delivery	
Scope of delivery	Quick installation guide, drilling template, mounting bracket, 4 wall plugs with screws, 4 sealing rings for mounting screws, 1 Torx wrench, 2-pin, 3-pin, 4-pin, and 5-pin terminal blocks
Notes	
Remark	NDAA compliance under Section 889

Optional Accessories

Art. Nr	Name	Product description
216209	eneo DOME-WB2-W	Wall bracket for IED-63xx Metal series and IEP-63Mxx, MEP-62Mxx

Optional Recommendations


Art. Nr	Name	Product description
212984	eneo TVA-1201TRA	UTP Transmitter+Receiver, UTP, BNC, 250m, Indoor, HD TVI CVI, AHD, CVBS, Active, 12V
212985	eneo TVA-1201TRP	UTP Transmitter+Receiver, UTP, BNC, 150m, Indoor, HD TVI CVI, AHD, CVBS, Passive
220299	eneo MAM-5MM1001M0A	Converter, HD-CVI, HD-TVI, AHD, Composite to HDMI, VGA, Composite, Indoor
225085	eneo MAM-5DC1004M0A	Distributor, 1x BNC Input HD-TVI, CVI, AHD, CVBS, 4x BNC Output
236125	eneo MAM-5MM2203M0A	Converter, 4K HD-TVI, HD-CVI, AHD, auf HDMI, Indoor
207599	jetrics cable BNC BS-BS-1	Videokabel mit 2 x BNC-Stecker 1m, 75 Ohm
207600	jetrics cable BNC BS-BS-2	Videokabel mit 2 x BNC-Stecker 2m, 75 Ohm
207601	jetrics cable BNC BS-BS-3	Videokabel mit 2 x BNC-Stecker 3m, 75 Ohm
207602	jetrics cable BNC BS-BS-3	Videokabel mit 2 x BNC-Stecker 5m, 75 Ohm

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Optional Services

Art. Nr	Name	Product description
211124	VIDEOR PAINTING SERVICE PTZ dome or panoramic camera	in RAL color
214441	VIDEOR PAINTING SERVICE basic costs	once per RAL color and delivery lot
229233	VIDEOR CON-KAM-AKON	Preconfiguration 1x analog camera Function test, FW update

Technical Drawing

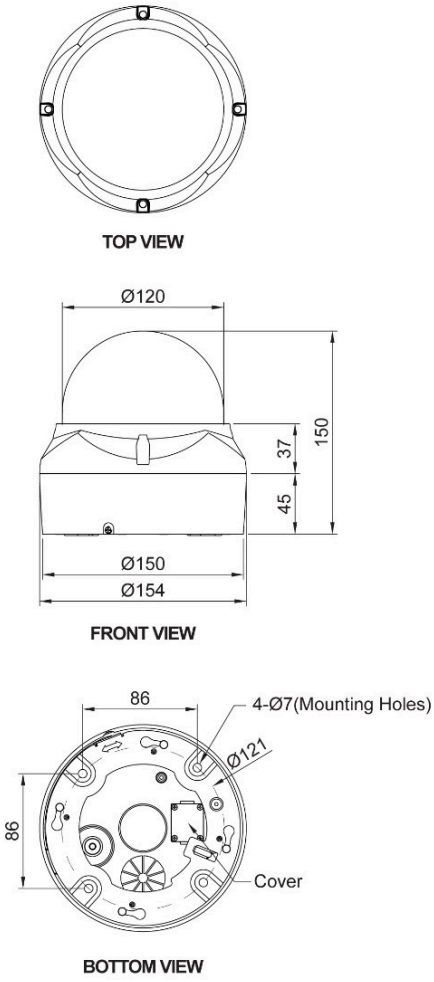

Maße / Dimensions: mm

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes