eneo MPD-62M2713P0B

Articlenumber: 243652

Short description

HD Analogue Dome Fixed, WDR, Day&Night, 2.7-13,5mm, Infrare 1920x1080, 12VDC, Indoor



Key features

- 1/2.8" 2 Megapixel SONY STARVIS 2 CMOS sensor
- Resolution max. 1920x1080 pixels (Full HD)
- Super low light performance by Sony STARVIS 2 technology
- Multisignal: HD-TVI, AHD, CVI and Composite selectable
- Digital signal: EX-SDI, HD-SDI selectable
- Motorized vari-focal lens 2.7~13.5mm
- Removable infrared cut filter
- ROI (Region of Interest) WDR mode
- Integrated motion detector, defog, privacy zones
- Wedge adapter included (10° inclination)
- Scratch resistant hard coated bubble
- Easy installation, 3-Axis gimbal

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Features

Product Labels	
EAN/GTIN	4260229841365
Manufacturer number	243652
Series	eneo COAXIZE
Camera	
Camera shape	Minsters
Chip size	1/2,8"
Photosensitivity	0.005Lux(Day mode), 0.0005Lux(Night mode)
Recording sensor	CMOS
System	True Day&Night
Low Speed Shutter	Yes
Flickerless function	Yes
Backlight compensation	Yes
Day/night switching	Switchable IR Filter (ICR)
Day/night mode	Automatic, Day, Night, extern (Sensor)
White balance	Automatic, Preset, Manual, AUTOext
Signal-to-noise ratio	50 dB
Video	
Signal Format	Composite (FBAS), HD-TVI @ 2MP, AHD @ 2MP
Resolution (extended)	1920x1080, 1280x720, 720x576
Lens	
Lens Type	Varifocal (motorized)
Focal length	2,7 - 13,5 mm
Zoom Factor (Digital)	0
Aperture Range (F)	F1.6
Vertical angle of view	54 - 18°
Horizontal angle of view	101 - 32°
Iris Control	DC
Zoomfactor (optical)	4
Display / Presentation	
Image resolution max.	1920x1080

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Features

DORI	
Perceiving (25px/m)	47 - 128 m
Watch (62px/m)	18 - 52 m
Detect (125px/m)	8 - 25 m
Identify (250px/m)	4 - 12 m
Features	
Motion detector	Yes
Analysis	Defog
Menu languages	German, English, French, Chinese, Japanese, Korean
Digital Noise Reduction (DNR)	Yes
Interfaces / Inputs / Outputs	
Video Outputs	HD-TVI, AHD, CHD, Composite (FBAS), HD-SDI
External connections	voltage input, 1x SDI Signal (BNC), 1x HD/SD Analog Signal (BNC), connection cable approx.15cm
Control Interfaces	Coaxitron (HD Protocol)
Interface Protocols	UTC (HD Signal Format)
General	
Wide Dynamic Range (WDR)	D-WDR
Lighting	Infrared
Dimensions (WxHxD) (extended)	94x116mm
Weight	0.26 kg
Illumination range	ca. 30m
Color (Housing)	white
Housing type	Inside
Housing material	Plastic
Power consumption	6 W
Mounting type	Wall, Ceiling
Power supply	12VDC
Temperature Range (Operating)	-10°C ~ +50°C
Text overlay	available
Scope of Delivery	
Scope of delivery	Quick installation guide, drilling template, 3x wall plugs with screws, video sub-output cable, flat and angled mounting adapters, universal tool

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Features

Notes	
Remark	NDAA compliance under Section 889

Further information

Sony STARVIS 2

Improved low-light performance (especially with HDR)

STARVIS 2 offers significantly improved performance in low light, especially with high dynamic range (HDR). It has been specially optimised for backlit situations and night scenes with high contrast.

Higher dynamic range (High Dynamic Range)

STARVIS 2 achieves up to 88 dB real dynamic range (Single Exposure) according to Sony - that's more than the original STARVIS. This helps to better display details in dark AND bright areas at the same time - without 'burning out' or 'drowning out' the image areas.

Uniform brightness across the image field

STARVIS 2 reduces the so-called vignetting effect (edge darkening) that can occur with BSI sensors. This means a more even image brightness, even in poorly lit conditions.

Better colour reproduction in low light

STARVIS 2 offers a more natural colour reproduction at night - colours appear less washed out or monochromatic. Particularly relevant for forensic applications (e.g. clothing, vehicles, skin tones).

Optional Recommendations

Art. Nr	Name	Product description
215912	SeeEyes SC-04MHD	Quad Splitter, 1920x1080, Composite, AHD, TVI, CVI Input Composite, HDMI, VGA Output
221811	SeeEyes SC-IPM07PRO	7" (17,8cm) Test Monitor, Touch, IP, HD/3G/EX-SDI, TVI, CVI, AHD, Composite, HDMI
212984	eneo TVA-1201TRA	UTP Transmitter+Receiver, UTP, BNC, 250m, Indoor, HD TVI CVI, AHD, CVBS, Active, 12V
212985	eneo TVA-1201TRP	UTP Transmitter+Receiver, UTP, BNC, 150m, Indoor, HD TVI CVI, AHD, CVBS, Passive
220299	eneo MAM-5MM1001M0A	Converter, HD-CVI, HD-TVI, AHD, Composite to HDMI, VGA, Composite, Indoor
225085	eneo MAM-5DC1004M0A	Distributor, 1x BNC Input HD-TVI, CVI, AHD, CVBS, 4x BNC Output

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Optional Recommendations


207599	jetrics cable BNC BS-BS-1	Videokabel mit 2 x BNC-Stecker 1m, 75 Ohm
207600	jetrics cable BNC BS-BS-2	Videokabel mit 2 x BNC-Stecker 2m, 75 Ohm
207601	jetrics cable BNC BS-BS-3	Videokabel mit 2 x BNC-Stecker 3m, 75 Ohm
207602	jetrics cable BNC BS-BS-3	Videokabel mit 2 x BNC-Stecker 5m, 75 Ohm
230068	jetrics jetpower-PSU-XS-11C Steckernetzteil	

Optional Services

Art. Nr	Name	Product description
211125	VIDEOR PAINTING SERVICE fix dome camera	in RAL color
214441	VIDEOR PAINTING SERVICE basic costs	once per RAL color and delivery lot
229233	VIDEOR CON-KAM-AKON	Preconfiguration 1x analog camera Function test, FW update

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Technical Drawing

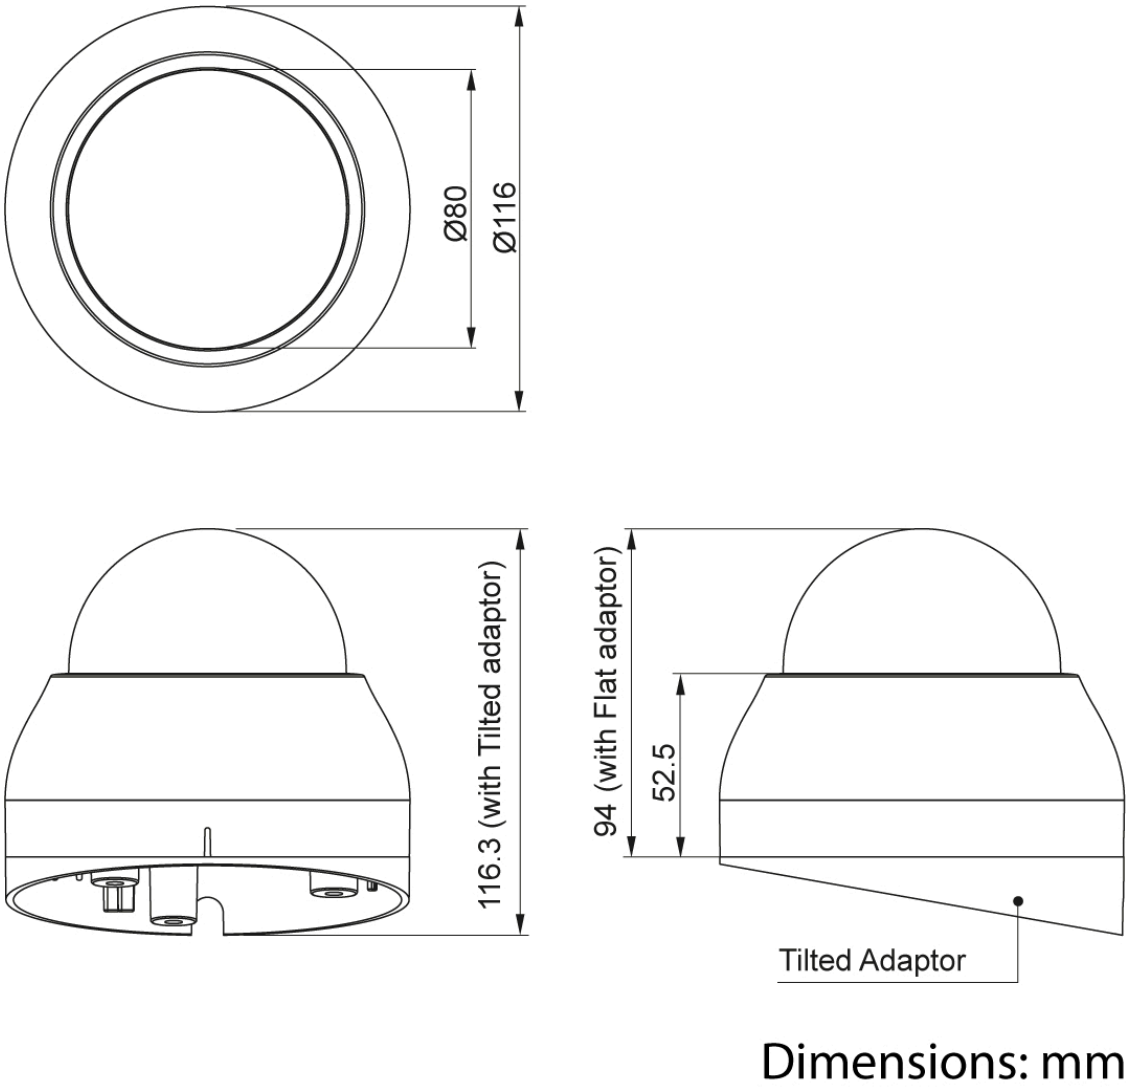

Dimensions: mm

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes