


SMT-2721D



SMT-2721D

Video Decoder Monitor



Key Features

- 27inch FHD monitor with built-in video decoder
- Up to 4K camera support
- Up to 64 live video streams
- Multiple screen layouts
- Dual power (HPoE and DC 24V)
- HDMI output for an external monitor
- FCC certified, NDAA compliant, Made in Korea
- Brightness 300 cd/m², Contrast 3000:1
- Designed and tested for 24/7 operations

Compatible Devices



SBM-4343

SMT-2721D

Video Decoder Monitor



Specifications

Display

Type	LED Monitor
Screen Size	27inch
Max. Resolution	1920x1080
Brightness	300 cd/m ²
Contrast Ratio	3000:1
Aspect Ratio	16:9
Viewing Angle (H/V)	178°/178°
Display Color	16.7M
Response Time	12ms
Panel Life	30,000 hours

Interface

Video	Connectors	HDMI#1 - Internal, Decoder main monitor, HDMI#2 - External, Decoder secondary monitor
HDMI	Connector	HDMI
	Available Format	1280x720@60Hz, 1280 X 1024@60Hz, 1920x1080@60Hz
Audio	Output Signal	Speakers : 8Ω 1W x 2
Network	Ethernet	1xRJ-45 10/100/1000BASE-T
USB	USB	2xUSB 2.0(Mouse,Keyboard), 1xUSB 2.0 (AD Firmware upgrade)

On Screen Display

Functions	VESA™ DPMS Compatible
Language	English, Spanish, French, Korean

General

Electrical	Input Voltage	DC24V, HPoE 802.3bt
	Power Consumption	31W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	10% ~ 80% (non-condensing)

General

Mechanical	Dimensions without Stand (WxHxD)	624x387x58mm(24.6x15.2x2.3")
	Weight	6.5kg(14.3lb)
	Cabinet Color	Black
	VESA Mounts Interface	100x100mm, 200x100mm, 200x200mm
	Packing Dimension (WxHxD)	725x500x150mm(28.5x19.7x5.9")
	Packing Weight	8.2kg(18.1lb)


Decoder

Video	Codec	H.265 / H.264 / MJPEG
	Max. Decoding Performance	2x8M@30fps, 12x2M@30fps
	Division (/Monitor)	- Clone mode (HDMI#1) Max. 64, - Expand mode (HDMI#1) Max. 36 (HDMI#2) Max. 25
	Layout	Up to 20, Sequence support
Audio	Codec	G.711 / G.726 / AAC
Management		Local UI, Web-Viewer, SSM
Time Setting		NTP/Manual
Export/Import		Configuration Export/Import
Log		Max. 100,000 (System log)
Protocol		RTP, RTSP, HTTP, CGI (SUNAPI), ONVIF
Security		IP address filtering, User access Log, 802.1x, Encryption, Device certificate(Hanwha Techwin Root CA), Signed firmware

Video Decoder Monitor



Unit: mm [inch]

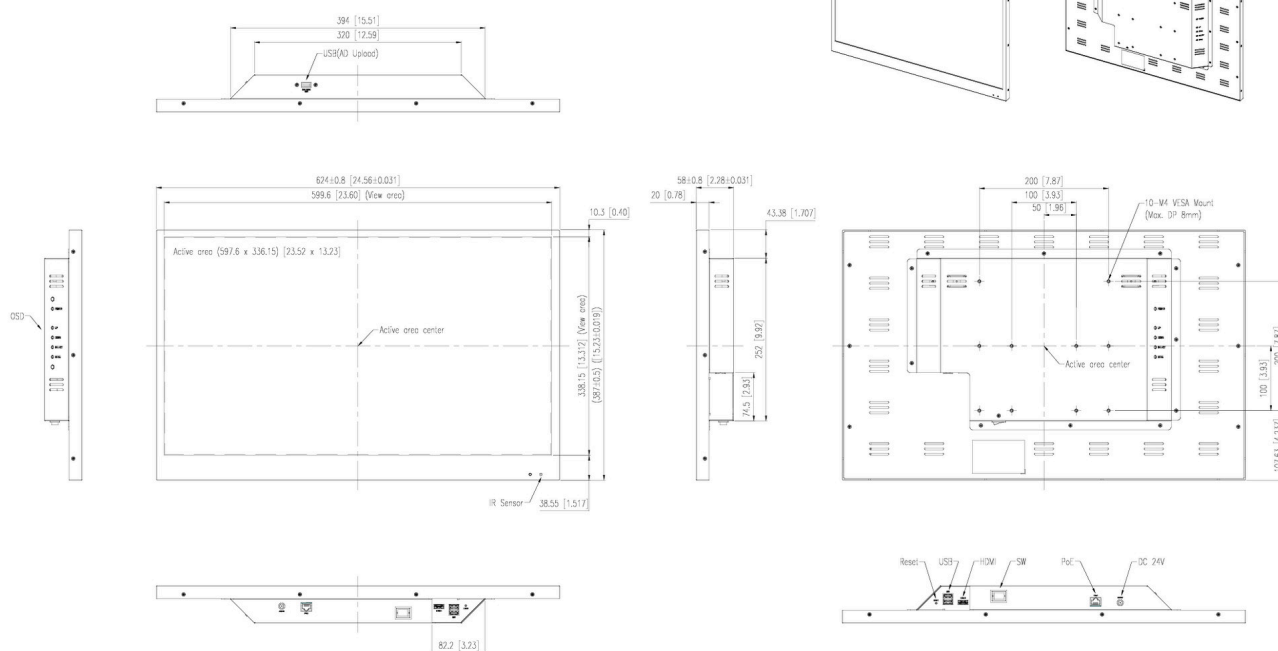

Revision	V1.0
Revision Date	25/04/17
Paper Size	A3
Unit	mm[inch]
Scale	1 : 5

©Hanwha Vision Co., Ltd. All right reserved.