

**DS-2AE4215TG
AE PTZ**

- 1/2.8" HD progressive scan CMOS
- High quality imaging with 1920 × 1080 resolution
- 15 × optical zoom and 16 × digital zoom allows for closer viewing of subjects in expansive areas
- Clear imaging against strong back lighting due to 120 dB WDR technology
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video output

▪ Specification

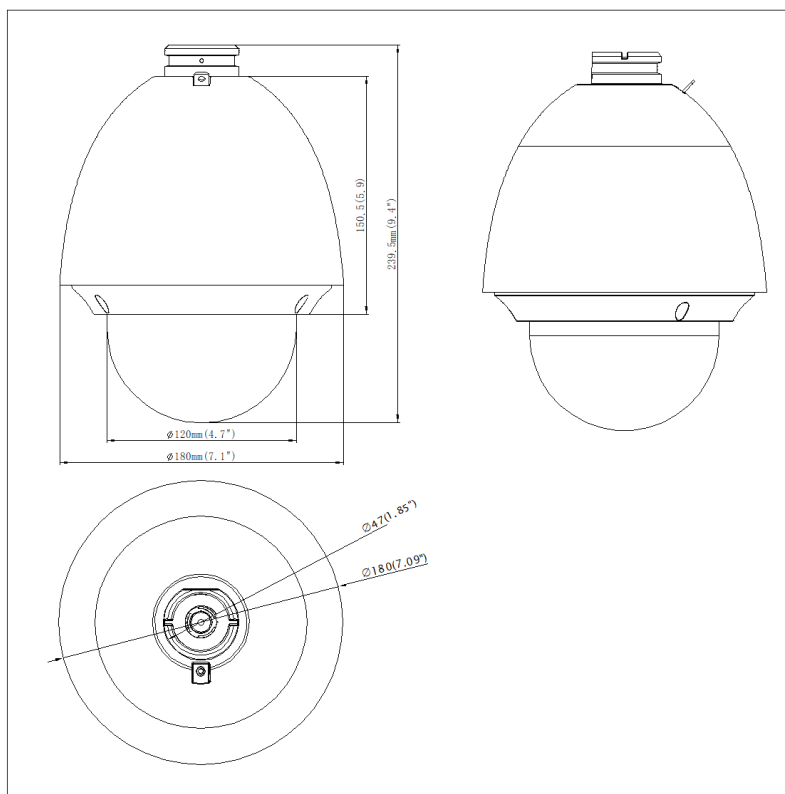
Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	1920 × 1080
Min. Illumination	Color: 0.005 Lux @(F1.6, AGC ON) B/W: 0.001 Lux @(F1.6, AGC ON)
Shutter Speed	PAL: 1/1 s to 1/30,000 s NTSC: 1/1 s to 1/30,000 s
Day & Night	IR cut filter
Zoom	15 × optical, 16 × digital
Lens	
Focal Length	4.8 mm to 72 mm, 15 × optical
FOV	Horizontal FOV: 57.6° to 4° (wide to tele) Vertical FOV: 34.4° to 2.2° (wide to tele) Diagonal FOV: 64.5° to 4.6° (wide to tele)
Focus	Auto, semi-auto, manual
Aperture	F1.6 to F3.5
Zoom Speed	Approx. 2.4 s (optical, wide to tele)
PTZ	
Movement Range (Pan)	360° endless
Movement Range (Tilt)	-5° to 90° (auto flip)
Pan Speed	Pan manual speed: 0.1° to 100°/s Pan preset speed: 100°/s
Tilt Speed	Tilt manual speed: 0.1° to 80°/s Tilt preset speed: 80°/s
Proportional Pan	Rotation speed can be adjusted automatically according to zoom multiples
Presets	256
Preset Freezing	Yes
Patrol Scan	10 patrols, up to 32 presets for each patrol
Pattern Scan	5 patterns, record time over 10 minutes for each scan
Park Action	Preset/Patrol/Pattern/Pan Scan/Tilt Scan/Panorama Scan/Day Mode/Night Mode/One-touch Patrol/None
Scheduled Task	Preset/Patrol/Pattern/Pan Scan/Tilt Scan/Panorama Scan/Day Mode/Night Mode/Zero Calibration/None
Power-off Memory	Yes
Video	
Frame Rate	50 Hz: 25 fps @(1920 × 1080) 60 Hz: 30 fps @(1920 × 1080)
Network	
Protocols	UTC protocol (or HIKVISION-C protocol in previous DVR)
Image	
Image Settings	AGC, white balance
Image Stabilization	EIS
Image Enhancement	BLC, HLC, 3D DNR
Privacy Mask	8 programmable privacy masks

Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS video output, (NTSC or PAL composite, BNC)
Alarm	2 alarm inputs, 1 alarm output
RS-485	Half-duplex mode Self-adaptive HIKVISION, Pelco-P, Pelco-D protocol
General	
Power	12 VDC, max. 16 W
Dimension	Ø 180 × 239.5 mm (Ø 7.1" × 9.4")
Weight	Approx. 2 kg (4.41 lb.)
Operating Condition	-30° C to 65° C (-22° F to 149° F). Humidity 90% or less
Language	English
Approval	
Protection	IP66 (outdoor dome), TVS 4,000 V lightning protection, surge protection and voltage transient protection

▪ Available Model

DS-2AE4215TG

▪ Dimension



▪ Accessory

▪ Optional

DS-1604ZJ-BOX-PO

LE

DS-1684ZJ






DS-1673ZJ
















DS-4650ZJ-WC

DS-1276ZJ

				
DS-1660ZJ	DS-1674ZJ	DS-4660ZJ-WC	DS-1618ZJ	DS-1604ZJ-BOX-CORNER
				
DS-1667ZJ	DS-1604ZJ-corner	DS-1604ZJ-pole	DS-1661ZJ	DS-1663ZJ
				
DS-1619ZJ	DS-1604ZJ-box	DS-1662ZJ	DS-1602ZJ	DS-1604ZJ
				

Installation Methods

Vertical Pole Mounting DS-1604ZJ-BOX-POLE	Vertical Pole Mounting DS-1684ZJ+DS-1602ZJ	Vertical Pole Mounting DS-4650ZJ-WC+DS-1602ZJ+DS-1674ZJ	Vertical Pole Mounting DS-1604ZJ-pole	Horizontal Pole Mounting DS-1673ZJ+DS-1663ZJ
				

<p>Corner Mounting DS-1276ZJ+DS-1602ZJ</p>	<p>Corner Mounting DS-4660ZJ-WC+DS-1602ZJ+DS-1674ZJ</p>	<p>Corner Mounting DS-1604ZJ-BOX-CORN ER</p>	<p>Corner Mounting DS-1604ZJ-corner</p>	<p>Gooseneck Mounting DS-1660ZJ</p>
				
<p>Gooseneck Mounting DS-1619ZJ</p>	<p>Junction Box DS-1674ZJ+DS-1602ZJ</p>	<p>Wall Mounting DS-1618ZJ</p>	<p>Wall Mounting DS-1604ZJ-box</p>	<p>Wall Mounting DS-1602ZJ</p>
				
<p>Wall Mounting DS-1604ZJ</p>	<p>Pendant Mounting DS-1667ZJ</p>	<p>Pendant Mounting DS-1661ZJ</p>	<p>Pendant Mounting DS-1663ZJ</p>	<p>Pendant Mounting DS-1662ZJ</p>
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

