

SE2701 27-INCH 4K UHD PROFESSIONAL DISPLAY




FEATURES

- **4K UHD Resolution:** crisp, high-definition imagery for accurate identification and analysis
- **PIP/PBP Functions:** simultaneous viewing of multiple video sources without switching screens
- **Eye-Care Technology:** flicker-free and low blue light for reduced eye fatigue.
- **Anti-Burn-in™ Technology:** Preserves image quality during static or repetitive surveillance content
- **2x HDMI & DP Connectivity:** Easy connection to multiple video sources for flexible setup


Designed for essential 24/7 monitoring applications, the SE2701 is a 27-inch 4K UHD professional display that delivers clear images and dependable performance for continuous operation. PIP/PBP functions and multiple HDMI and DisplayPort inputs enable flexible multi-source viewing, while Eye-Care and Anti-Burn-in™ technologies support viewing comfort and consistent image quality during extended use. The SE2701 is a practical choice for security control rooms, industrial systems, traffic management, network operation centers, and other continuous monitoring environments.

TECHNICAL DRAWING

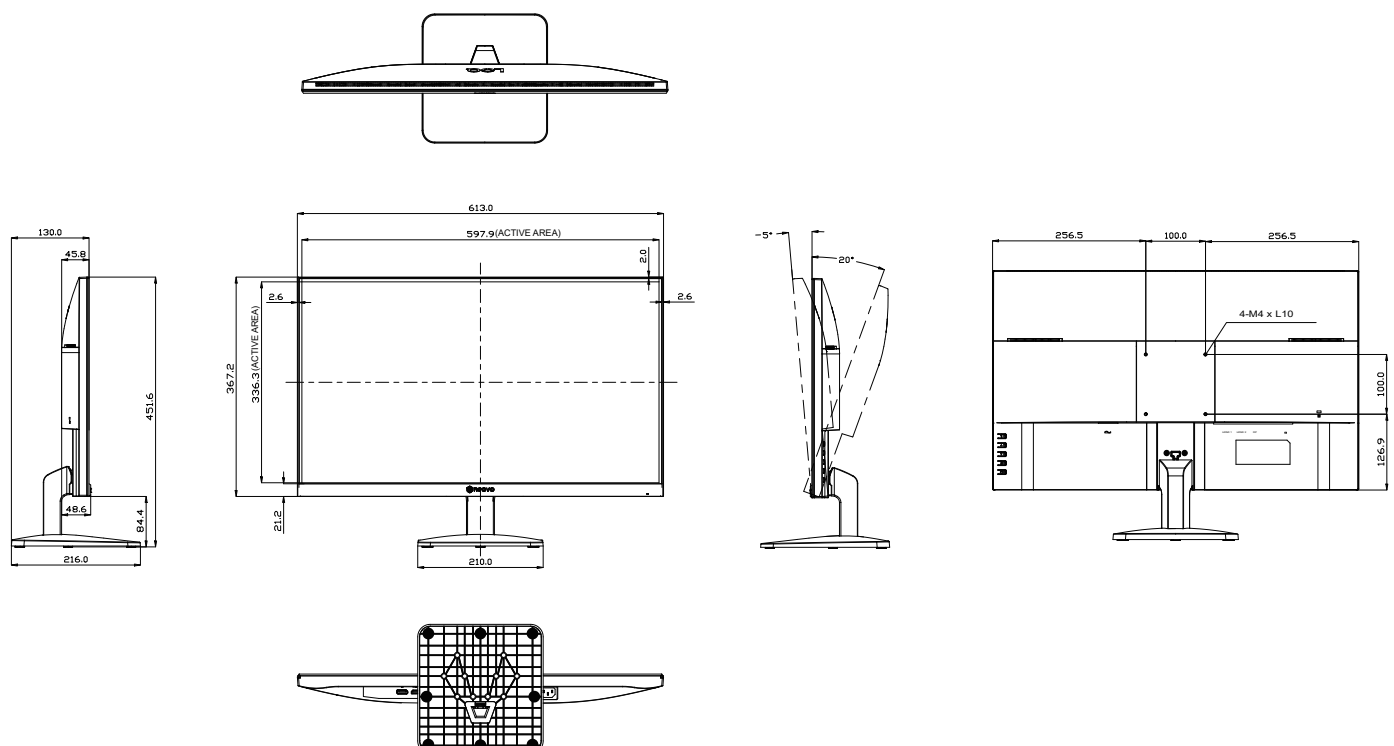

SPECIFICATIONS

Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	27.0"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.155 mm
Brightness	300 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	1.07B
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 25%), 3H Hard Coating
Frequency	
Frequency (H)	15 kHz-136 KHz
Frequency (V)	23 Hz-76 Hz
Signal Input	
DisplayPort	1.4 x 1
HDMI	2.1 x 2
Audio	
Earphone	Stereo Audio Jack (3.5 mm)
Internal Speakers	3W x 2
Power	
Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	22W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Operating Conditions	
Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-85% (non-condensing)
Storage Conditions	
Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-85% (non-condensing)
Mounting	
VESA FPMPI	Yes (100 x 100 mm)
Stand	
Tilt	-5° to 20°
Security	
Kensington Security Slot	Yes
Dimensions	
Bezel Width	2.0 mm (Top) 2.6 mm (Left/Right) 21.2 mm (Bottom)
Product with Base (W x H x D)	613.0 x 451.6 x 216.0 mm (24.1" x 17.8" x 8.5")
Product w/o Base (W x H x D)	613.0 x 367.2 x 48.6 mm (24.1" x 14.5" x 1.9")
Packaging (W x H x D)	705.0 x 480.0 x 120.0 mm (27.8" x 18.9" x 4.7")
Weight	
Product with Base	4.3 kg (9.5 lb)
Product w/o Base	3.9 kg (8.6 lb)
Packaging	5.6 kg (14.3 lb)
Regulation Approval	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, UKCA
Accessories	
Supplied	Power Adaptor, HDMI Cable, Quick Start Guide
Optional Accessories	
Ceiling Mount	CMP-01 + WMK-03
Wall Mount	WMA-01, WMK-01, WMK-03, PMK-01
Desk Mount	DMC-01
Stand	ES-02



All specifications are subject to change without prior notice.
Copyright © 2026 AG Neovo. All rights reserved.
The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: SE2710 Version 1.0, 20260825