




eneo TSD-52F0013P0A

SKU: 221916

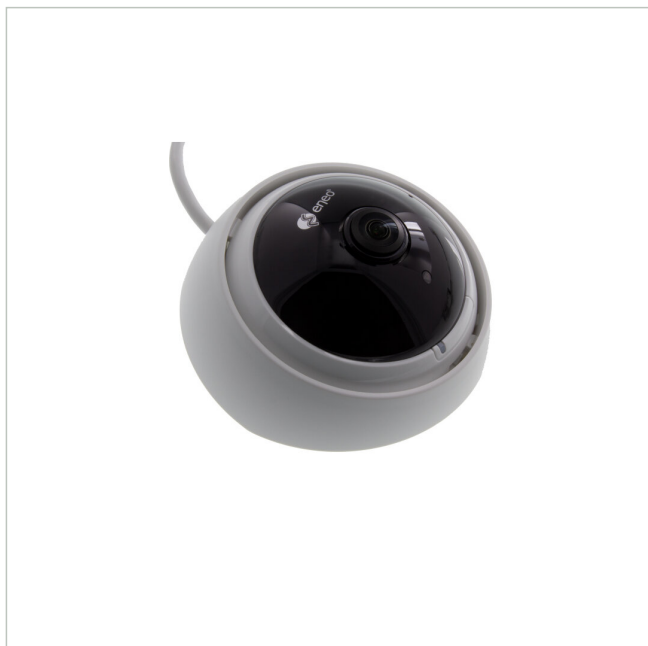

1/3" HD Dome, Fixed, Day&Night 1920x1080, Infrared, 1,34mm, 360°, Indoor, 12VDC

Main Features

1/1,3" Progressive CMOS-Sensor

1,34mm fixed focal length

HD-TVI analouge fishEye camera

360° surround and 180° panorama view

Resolution max. 1920x1080@25fps

D-WDR (Digital Wide Dynamic Range)

UTC support remote control by Pelco C protocol

For ceiling and wall installation

Compact design for indoor application

Specifications

General	
Heating	No
Lighting	Infrared
Dimensions (WxHxD) (extended)	33,5x77mm
Illumination range	ca. 7m
Weight	0.345 kg
Color (Housing)	white
Color (dome)	clear
Housing type	Inside
Housing material	Plastic
Camera Type	Fisheye Camera
Power consumption	3.2 W

eneo TSD-52F0013P0A

Continuation of the specifications

Mounting type	Ceiling, Wall
Power supply	12VDC
Temperature Range (Operating)	0°C ~ +40°C
Wide Dynamic Range (WDR)	D-WDR
Camera	
Low Speed Shutter	No
Recording sensor	CMOS
Chip size	1/3"
Camera shape	Minsters
Signal-to-noise ratio	50 dB
Day/night mode	Automatic,Day,Night
White balance	Automatic,Push lock
Photosensitivity	0,5 Lux bei F2,0,30 IRE
System	True Day&Night
Day/night switching	Switchable IR Filter (ICR)
Display	
Image resolution max.	1920x1080
Functions	
Motion detector	No
Digital Noise Reduction (DNR)	Yes
Menu languages	English
Interfaces / Inputs/ Outputs	
Alarm inputs	0
Number of alarm outputs	0
External connections	12VDC input (DC plug), 1x HD Analog Signal (BNC),connection cable approx.40cm
Interface Protocols	UTC (HD Signal Format)
Control Interfaces	Coaxitron (HD Protocol)
Parts supplied	
Scope of delivery	manual,drilling template,screw set
Lens	
Horizontal angle of view	360°
Focal length	1,34 mm
Aperture Range (F)	F2.0
Lens Type	Prime lens
Zoom Factor (Digital)	0
Video	
Signal Format	HD-TVI @ 2MP
Product labeling:	
Manufacturer order number	221916
Series	eneo EX-Serie

eneo TSD-52F0013P0A

Your contact person

VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Germany

