
eneo IAD-5SG1004MUC

Articlenumber: 237369

Short description

Gigabit Switch, Unmanaged, 60W, 4x PoE, 1x RJ45, 1x SFP, 10/100/1000 Mbps, Desktop

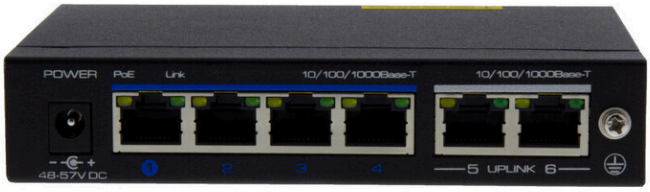

Key features

- Gigabit PoE switch, desktop application
- 4x 10/100/1000 PoE+ ports, IEEE 802.3af/at
- Gigabit uplink ports: 1x RJ45, 1x SFP
- Up to 30W per port, total ≤60W.
- Overvoltage protection IEC61000-4-5 (6KV).
- Temperature range (operation) -5°C~45°C
- CCTV mode enables transmission up to 250m @10Mbps
- CCTV mode supports PoE watchdog function
- Plug and Play, no settings required
- Metal housing

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Features

Product Labels	
Manufacturer number	237369
Network	
Security	CCTV mode
Eneo _netzwerkstandards	IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX, IEEE 802.3x Flow Control
Internal Switching Capacity (MP per second)	8.9 Mpps
Internal Switching Capacity (Gbit)	12 Gbps
Interfaces / Inputs / Outputs	
Ethernet interface	10Base-T, 100Base-TX, 1000Base-T
Ports	1x 1000Base-X SFP, 4x 10/100/1000Base-T (PoE), 1x 10/100/1000Base-T
General	
Design	Desktop
Dimensions (WxHxD) (extended)	27x135x86mm
Weight	300 kg
Number of PoE ports	4
Type	Unmanaged
Power consumption	65 W
Mounting type	Desktop
PoE Budget (Total)	60 W
Power over Ethernet	IEEE 802.3af, IEEE 802.3at
Power supply	48-57 VDC
Temperature Range (Operating)	-5°C ~ +45°C
Application environment	inside
ESD protection	IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6
Scope of Delivery	
Scope of delivery	manual, power cord, Mounting Bracket, PSU

Optional Accessories

Art. Nr	Name	Product description
216477	eneo SFP-1310S40	SFP Modul, 1.25Gbps, 20km, Singlemode, 1310nm, Duplex LC Connector -40°~+75°C

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes

Continuation Optional Accessories

216478	eneo SFP-1310M40	SFP Modul, 1.25Gbps, 550m, Multimode, 1310nm, Duplex LC Connector, -40°~+75°C
216479	eneo SFP-0850M10	SFP Modul, 1.25Gbps, 550m, Multimode, 850nm, Duplex LC Connector, 0°~+70°C
216566	eneo SFP-1310S10	SFP Modul, 1.25Gbps, 20km, Singlemode, 1310nm, Duplex LC Connector, 0°~+70°C
218758	eneo SFP-0850M40	SFP Modul, 1,25Gbps, 550m, Multimode, 850nm, Duplex LC Connector, -40° ~ +70°C

Optional Recommendations

Art. Nr	Name	Product description
228555	jetrics NDR-240-48 DIN RAIL	Power Supply, 230VAC / 48VDC, max. 240W, for DIN rail mounting

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

© Copyright VIDEOR E. Hartig GmbH - November 2026 - Subject to technical changes